


FLEXIBLE SERIES

Indoor P2.5 mm

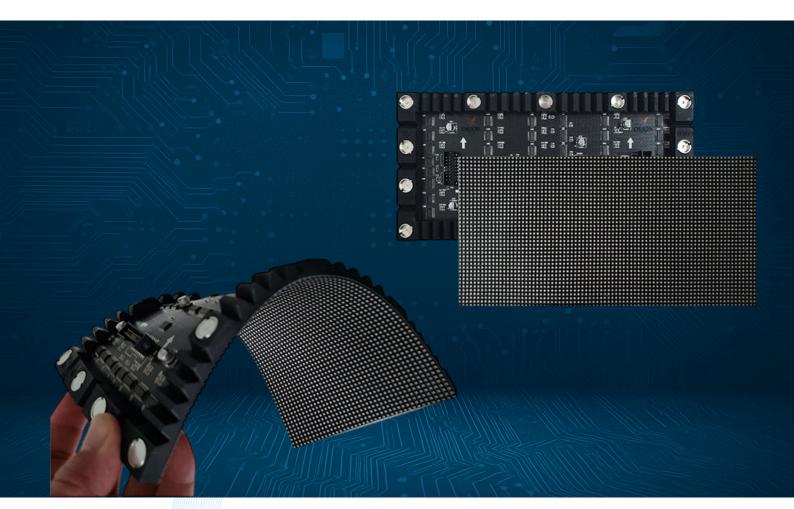

Features

- UHD picture quality
- Light Weight
- Ultra-Thin Display
- Soft Rubber Module
- Magnetic Flexible Module
- 2 years standard warranty (extendable up to 3 years)

The Orion P2.5mm Flexible Series LED display is a highly adaptable and innovative solution designed for creative and unconventional visual setups. Its strong magnetic flexible modules allow for front-service installation, making it ideal for complex and specialshaped structures where maintenance accessibility is crucial. Built with high-quality silicone materials for both the PCB base and tray-along with copper pillar welding and precise screw placements—the series ensures superior screen flatness and optimal visual performance.



FLEXIBLE SERIES

Indoor P2.5 mm

Technical Specification

Model No.	P2.5
LED Type	Black SMD2020
Pixel Pitch(mm)	2.5
Drive Method	1/32
Module Size(mm)	320X160mm
Module Resolution(pixel)	128×64
Pixel Density	160,000 pixels/m²
Viewing Angle	H 140", V 140*
Brightness	300-800cd/m²
Refresh Rate(Hz)	≥3840
Frame Rate(Hz)	≥50-60
Voltage(V)	AC 110/220V
Avg. Power Consumption	200W/m²
Max. Power Consumption	600W/m²
Service Access	Total Front Access



FLEXIBLE SERIES

Indoor P2.5 mm

IP Grade	IP31
Operating Temp/Humidity	0 °C -50 °C ,10−90%RH
Storage Temp/Humidity	0 °C -60° °C ,10−90%RH
Lifetime(Normal Temp)	≥100,000H@50% brightness
Cabinet Frame Size(mm)	Customized Cabinet
Cabinet Type and Material	Sheet metal
Screen resolution	Customized
Cabinet Weight (Kg)	32 KG Per sqm

Specifications and product information are subject to change without prior notice due to ongoing innovation and development. For the most up-to-date details, please visit www.orion-led.com.



ATENTI ORIGINS PHOTOELECTRICITY CONSORT PVT.LTD.

Reg. Office: 504, 5th Floor ABW Elegance Tower, Jasola District Centre, Jasola, New Delhi - 110025 Branch Offices: Lucknow, Mumbai, Hyderabad Factory: B-10, Sector-88, Noida - 201301











